



REMOVABLE COVERS FOR WATER PROCESS TANKS




REMOVABLE COVERS FOR WATER PROCESS TANKS

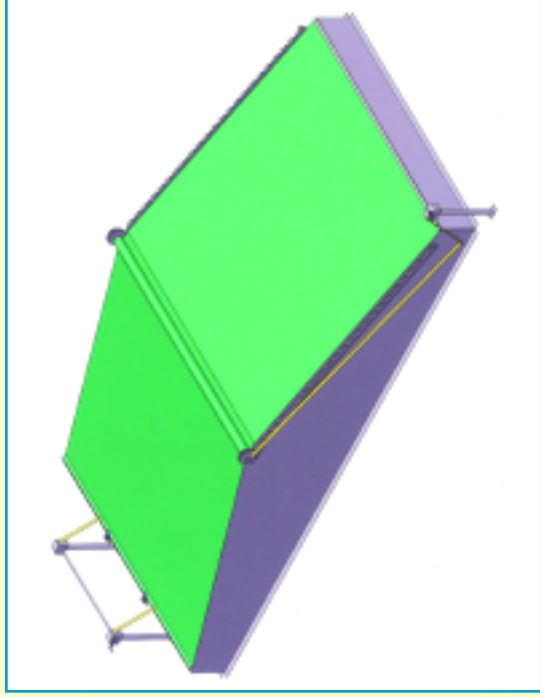

Cover in fully closed position

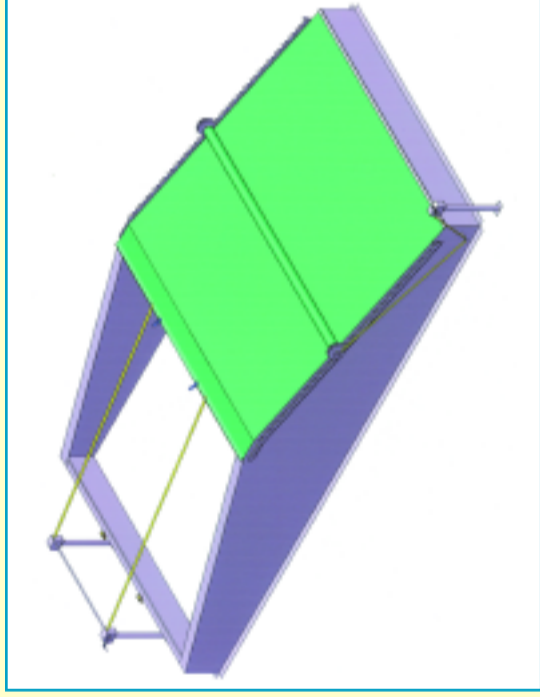

Cover partly opened

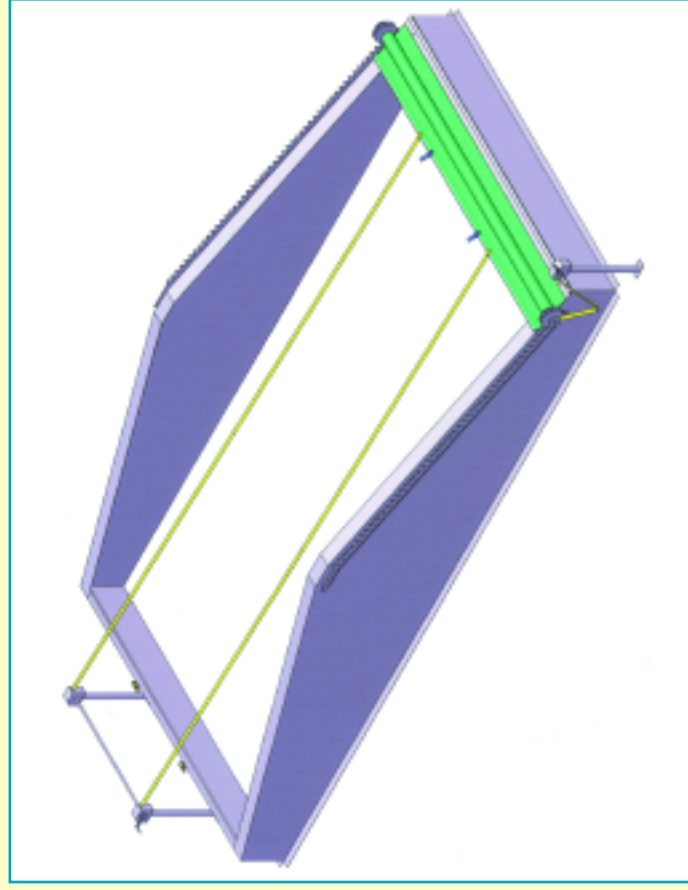

Cover in fully open position



Power Plastics Ltd Station Road Thirsk North Yorkshire YO7 1PZ
Tel: +44 (0) 870 850 8067 Fax: +44 (0) 870 850 8068
Email: info@powerplastics.co.uk



REMOVABLE COVERS FOR WATER PROCESS TANKS

- With ever increasing legislation and Health and Safety awareness our removable tank covers are increasingly being specified by many water authorities to cover process tanks at their various water treatment sites.

The covers supplied and fitted by ourselves can be quickly and safely removed by one person to offer full access to the tank as required. This may be required simply to inspect the process tank or to carry out necessary cleaning/maintenance work of the tank process.

The covers are manufactured from our Power Plas® 2 x 2 PVC material which is durable, strong and UV resistant.

The advantages of fitted covers include:

- Preventing foreign matter entering the tank.
- Preventing light entering the tank reducing the risk of algae growth.
- Control odour within the tank.

Each cover is individually designed, manufactured and installed on site by our team of dedicated fitters.



The winch is supplied with each installation for removal of the tank cover




Prior to manufacture Power Plastics undertake a full site survey using the latest technology.

REMOVABLE COVERS FOR WATER PROCESS TANKS

- Using information obtained from the site survey detailed general arrangement drawings are produced for approval by the client.

At this stage we would also provide the necessary safety documentation such as:

- Method Statement
- Risk Assessment
- COSHH Documentation
- Any other Safety Requirements

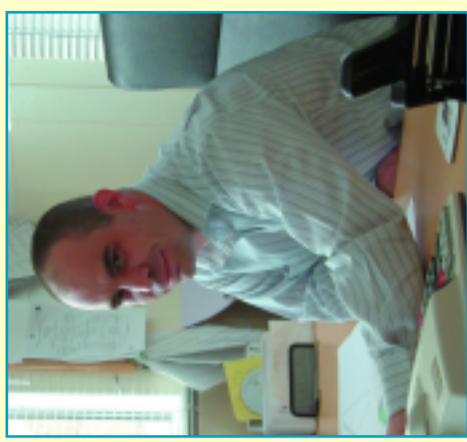

After approval by the client the drawings are transferred for manufacture with computerised cutting and welding machines.



- To ensure minimum time is spent on site the covers and the associated metal works are prefabricated in our factory, delivered and fitted by our team of experienced engineers.



Tanks prior to fitting of Reel away covers.



Completed Installation of Cover

Completely exposed tank – View of tank with the cover in the fully open position showing unobstructed access to the tank. (right)

