




VORTEX™

WASTEWATER TREATMENT SYSTEM

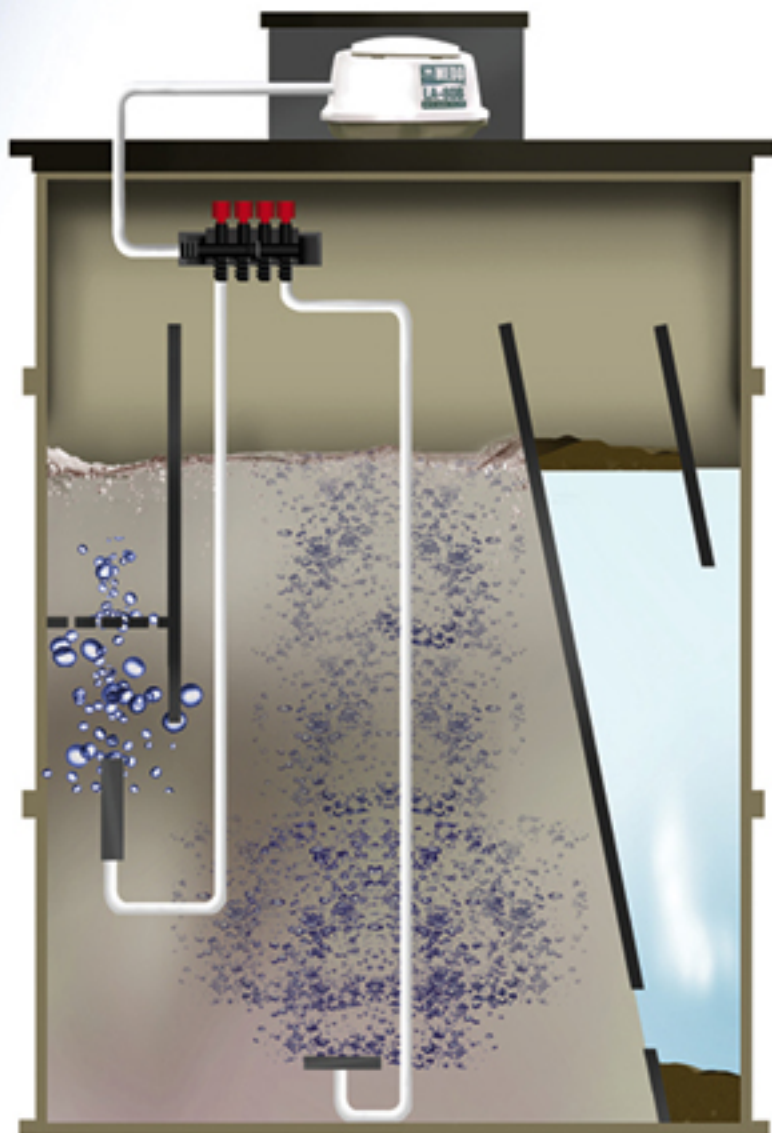

Electricity Required	YES
Internal Moving Parts	NO
Safe For Discharge To Watercourse	YES
Average Desludge Interval	12 Months
Average Service Interval	6 - 12 Months
Tank Warranty	10 Years

Your Local Distributor is:

ADVANTAGES


- Excellent effluent quality.
- Simple and reliable operation.
- Excellent build quality.
- Low noise.
- Low electricity demand.
- Easy installation.
- CE marked.
- EN 12566-3 certified.
- Excellent value for money.
- Odourless
- Discharge to ground or watercourse
- Internal Sampling Chamber (no extra chamber to buy & install)

INTRODUCTION


The Vortex is an advanced Activated Sludge Process (ASP) sewage treatment plant.

It is capable of receiving wastewater from buildings not connected to mains drainage and processing it so that only a clear effluent is discharged into the environment.

The Vortex has been tested and certified to **EN 12566-3**.



HOW THE SYSTEM WORKS

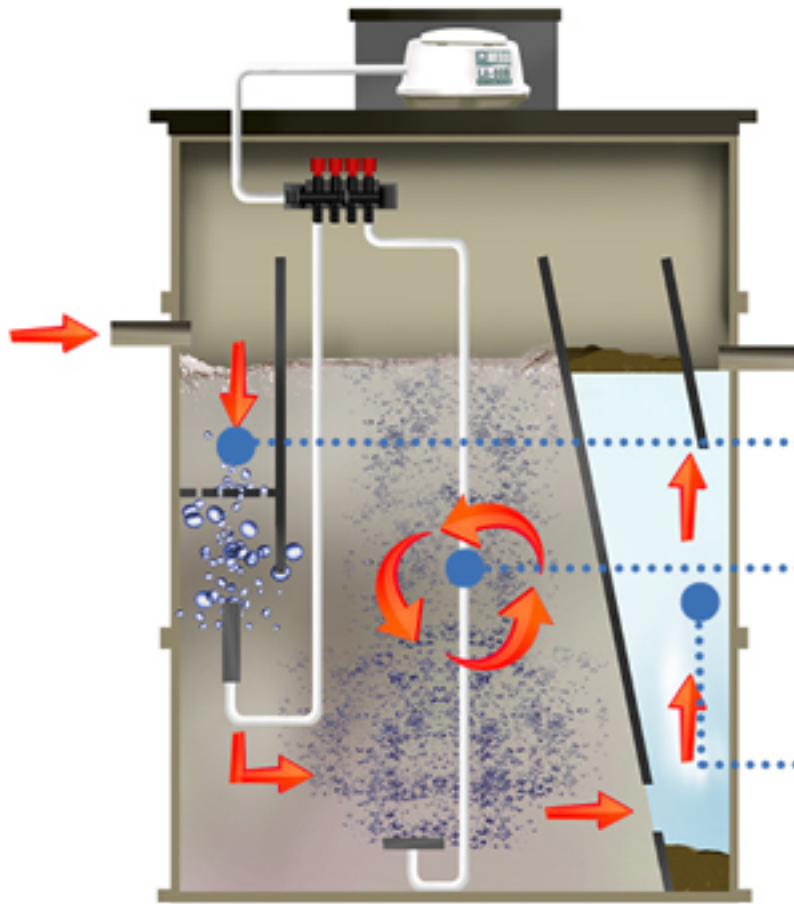

The Vortex Treatment Process

Unlike most sewage treatment plants the Vortex is designed to treat both the solid and liquid components of wastewater. It does this by using a combination of coarse and fine air bubbles.

Wastewater from the building enters the Vibro Screen. Here coarse air bubbles are used to physically break down solid matter and form a mixed soup with the water.

The mixed soup flows into the Aeration Chamber. A bacterial culture is present in the Aeration Chamber which digests the pollutants in the wastewater. The bacterial culture must have a constant oxygen supply and this is provided by a fine bubble diffuser at the base of the tank.

The mixed soup then flows into the Clarification Chamber where it is able to separate into clear, treated effluent and sludge. The clear effluent is able to flow past the scum baffle and out of the tank.

Tank cross sections for graphical representation only


The Sludge Management System (SMS)

All Activated Sludge Process (ASP) sewage treatment plants produce sludge as part of the treatment process. The vortex's Sludge Management System is one of the elements that make it an advanced ASP.

The sludge is composed of partially digested solid matter. The Vortex is able to return the sludge back to the Aeration Chamber for further digestion by the bacteria.

The recycling of sludge back to the Aeration Chamber gives the bacteria a food supply even when there is little or no wastewater coming from the building. This makes the Vortex better able to handle low occupation stress than other ASP sewage treatment plants.

This recycling of sludge is done without the use of electrical or mechanical components in the tank.

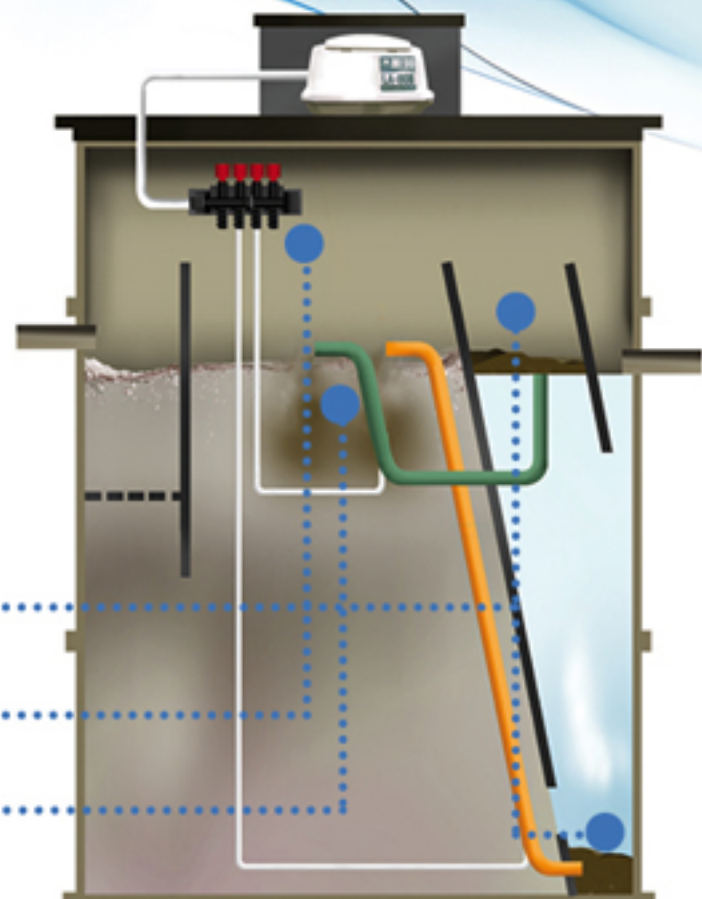

In the Clarification Chamber sludge accumulates at the bottom (settled sludge) and top (floating sludge) of the tank.

Air from the blower is spurred from the regulator to two sludge return pipes.

This creates a continuous vacuum that sucks the sludge from the top and bottom of the Clarification Chamber back to the Aeration Chamber.

PERFORMANCE

The Vortex has been designed to meet the UK Royal Commission Standard for effluent of:

BOD ₅	20 mg / L
Suspended Solids	30 mg / L
Ammonia	20 mg / L

Due to the Vortex's unique design it far exceeded the above standard during EU testing and achieved the following average effluent quality:

BOD ₅	7.4 mg / L
Suspended Solids	15.2 mg / L
Ammonia	0.4 mg / L

TECHNICAL DETAILS

Model	PE	Tank Diameter (m)	In Ground Depth (m)	Inlet Invert (m)*	Outlet Invert (m) †	Power (Kw)
Vortex 4	4	1.340	2.000	0.650	0.720	0.06
Vortex 6	6	1.440	2.000	0.650	0.720	0.08
Vortex 10	10	1.760	2.000	0.650	0.720	0.10
Vortex 15	15	1.760	2.750	0.703	0.750	0.12
Vortex 20	20	2.050	2.550	0.503	0.550	0.20
Vortex 30	30	2.300	2.550	0.503	0.550	2x 0.12
Vortex 40	40	2.600	2.450	0.403	0.450	0.20 + 0.12

† Pump stations available

* Other inlet options available

INSTALLATION

The Vortex is easy to install and is suitable for high groundwater sites. When installed on dry sites there is no requirement for concrete.

There are shallow inlet options for every tank in the Vortex range for where a shallow installation is required.

Vortex AG tanks are specially reinforced for above ground installation applications.

Please contact our office for details on your nearest trained installer.



SERVICING

The Vortex sewage treatment plant requires servicing every six to twelve months.

The servicing is done by trained service engineers to ensure that the system functions correctly giving the owner piece of mind. Please contact our service partner Sapphire Environmental (+44 (0) 1757 289 681) for details on servicing.

CONTACT



www.wte-ltd.co.uk

E: info@wte-ltd.co.uk T: 01757 288022 / 289423

Water Technology Engineering Ltd, The Byre, Foggathorpe, SELBY
Yorkshire YO8 6PX United Kingdom



CRYSTALTanks

www.crystaltanks.com