

# See the difference above and below the line

A complete piping system for black and grey water drainage on passenger vessels, SeaDrain® White offers a lightweight, easy-to-install system that enhances safety and efficiency on board. The corrosion-free and incrustation-free plastic piping system effectively eliminates leakage and downtime due to corrosion damage.



### Increased safety onboard

SeaDrain® White is produced from a light, flexible, tough and corrosion-free high-performance polymer. SeaDrain White has a best in class safety pressure rating of 4 bar, making it ideal when passenger safety is critical for black and grey water applications.



### Environmentally friendly

Made of polypropylene plastic, SeaDrain® White takes less CO2 to manufacture making it an eco-friendly alternative to metals.




### Less downtime

The ultra-smooth inner surface of SeaDrain® White means encrustation is a thing of the past and reduced downtime is a thing of your future.



### Fast installation

The unique push-fit and lock mechanism of the SeaDrain Fast-Lock® jointing system makes installation up to 5x faster than alternative metal solutions.

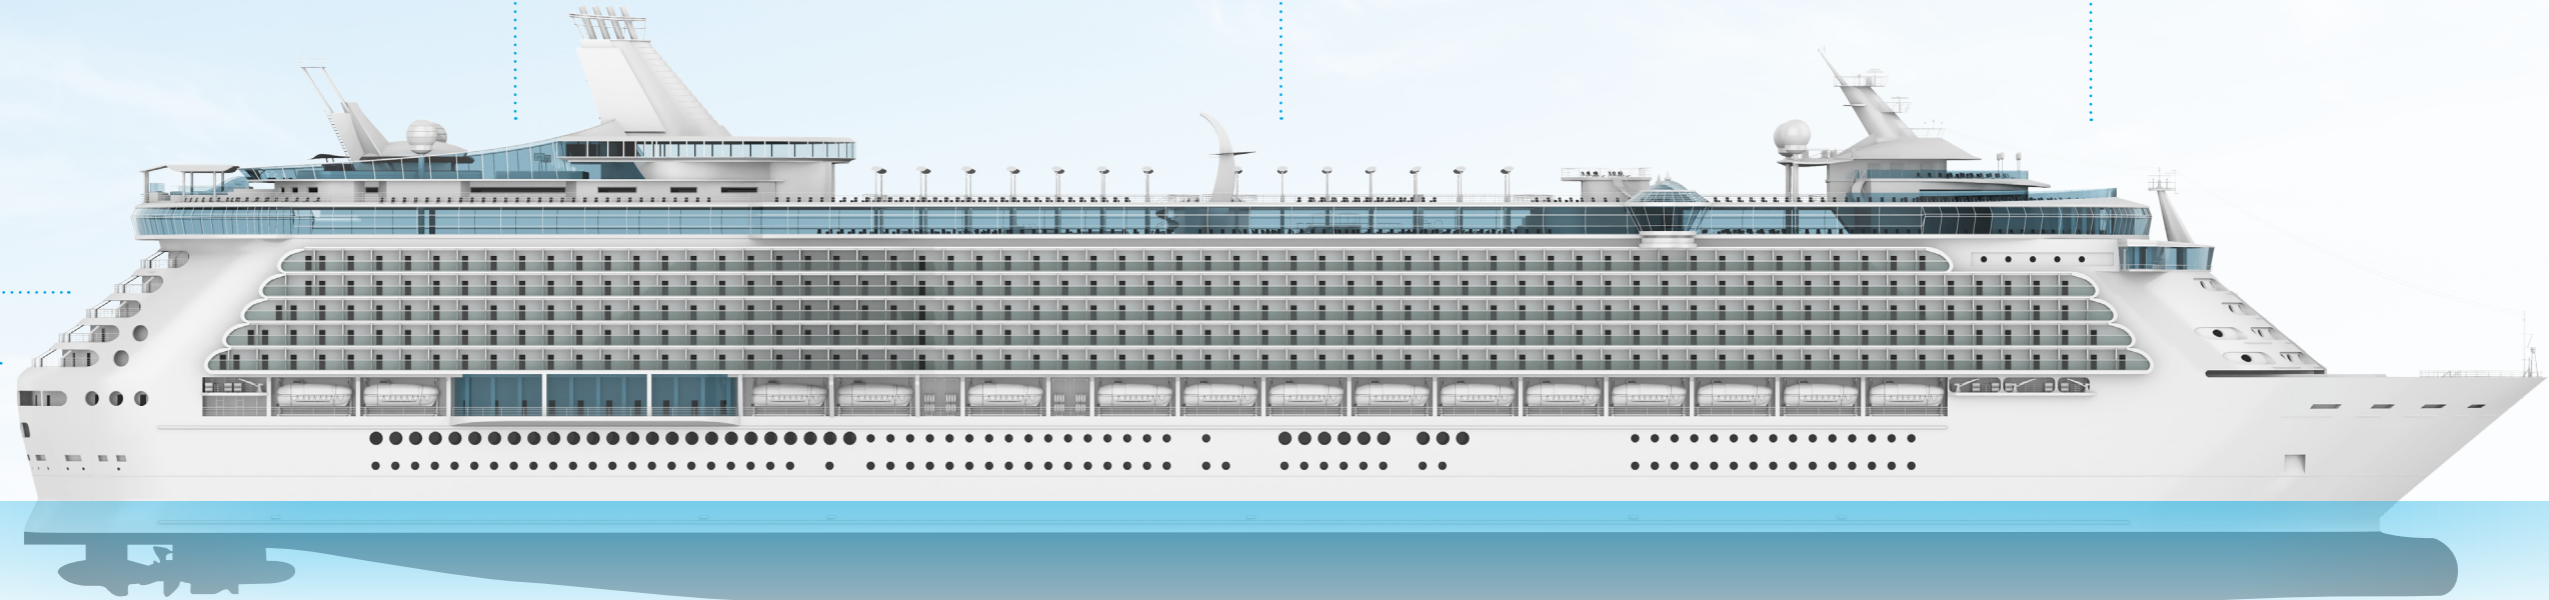

### UV-resistant, no paint needed

SeaDrain® White's bright white external coloring includes additives for UV resistance against discoloration, negating the need for external paint. Therefore, both pleasing aesthetics and reduced work hours are achieved across an install of up to 24,000 ft of balcony piping alone.



### Lower operating costs

Made entirely from a non-corroding thermoplastic, SeaDrain® White is engineered for a minimum of 25 years life compared to 5 to 10 years for metal alternatives.



### Easy to install

With a single tool, SeaDrain Fast-Lock® is quick and easy to install for line sizes 4" (DN100) and below. Automated electrofusion is available in all sizes 1½" (DN40) to 6" (DN150).



### Multiple jointing options

With multiple jointing options, SeaDrain® White makes it easy to transition between food prep (USPH) and general use application spaces.

# 50%

weight savings versus metal systems

# 4 Bar

best in class safety pressure rating

# 45,000

less pipe hangers\*

# \$930k

average install saving\*

\*Based on vessel size of 130,000 GT