




# KS Filter

Continuous backwash sand filter

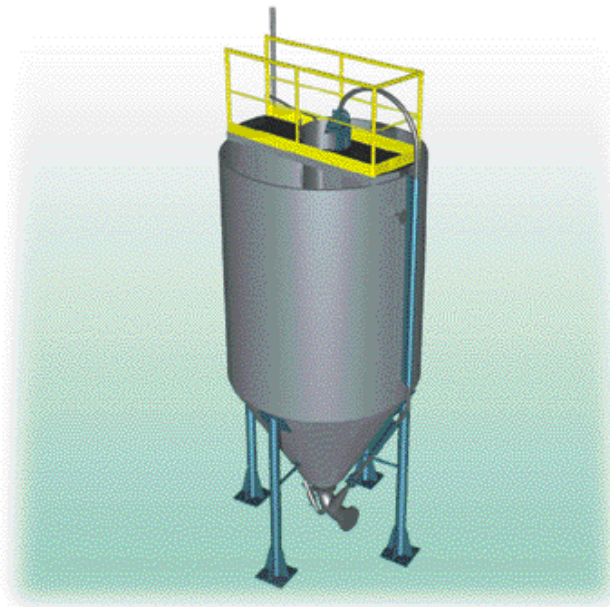

**The KS Filter is equipped with a unique Double Sand Backwash device that allows flexibility and reliability in operation.**

## Main advantages :

- Give excellent filtered water quality using double backwash device.
- Simple and maintenance free operation.
- Complete peripheral equipment and accessories allows perfect operational control and fine setting of the backwash.

## Main applications :

- Surface water treatment to potable quality.
- Tertiary treatment.
- Process water preparation.
- Process water recycling.
- Algae removal.

The backwash of the sand is the most important process parameter for this type of filter.

The sand is taken from the bottom and is pumped by an airlift into the washing chamber. From there it falls back on the top of the sand bed.


The quality of the filtered water depends on the size of the sand and on the sand backwash rate. Therefore the **KS FILTER** is equipped with a sophisticated and carefully sized double backwash facility. This design allows a wide variation and fine setting of the backwash parameters.

Eight sizes available : 1,5 to 7 m<sup>2</sup> filtration area with 1 or 2 m deep sand filter.





KSF 5-2 - Tertiary treatment (dephosphorylation)

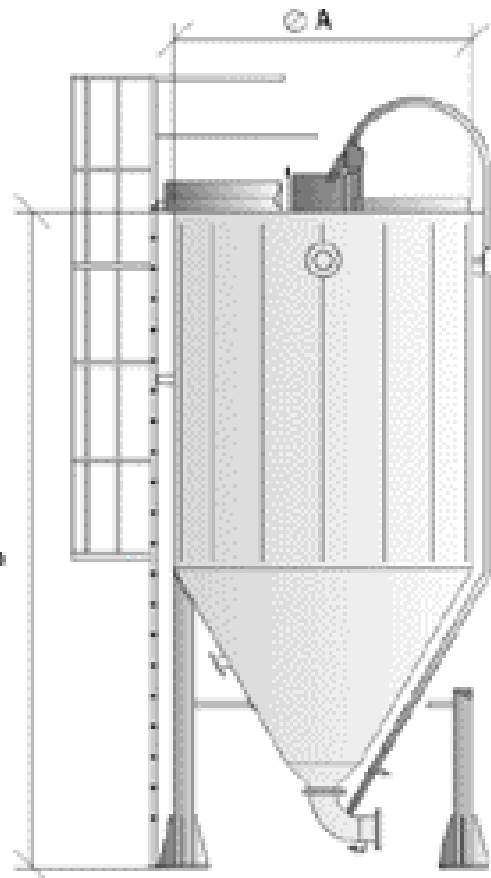

Type	Filtration area (m <sup>2</sup> )	ø A (mm)	B (mm)	Weight tons (full of water)
KSF 1,5-1	1,5	1400	4200	6
KSF 1,5-2	1,5	1400	5200	8
KSF 3-1	3	2000	5000	18
KSF 3-2	3	2000	6000	23
KSF 5-1	5	2500	5500	31
KSF 5-2	5	2500	6500	39
KSF 7-1	7	3000	5900	44
KSF 7-2	7	3000	6900	55


**KWI - Engineering**

Acti-village, lot 15 - F-69500 Bron - France  
 Tél. : +33 (0)4 72 37 05 42 - Fax : +33 (0)4 72 37 82 46  
 Email : info.france@kwi-intl.com



**KWI - Operations Headquarters**

KOREKO - KWI GmbH  
 Auengasse 8 - A-9170 Ferlach - Austria  
 Tél. : +43 4227 3266 - Fax : +43 4227 3449  
 Email : info.austria@kwi-intl.com



Atelier de fabrication ISO 9001 / 14001

