


Minicell™

Dissolved air flotation (DAF) clarifier for small flow applications

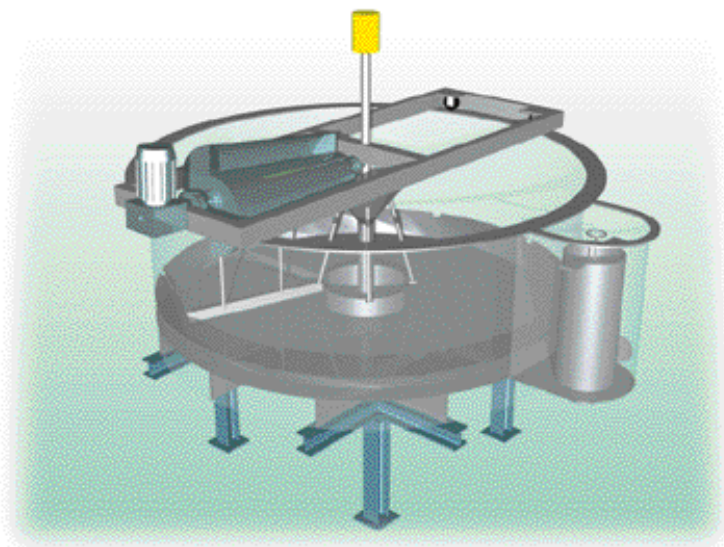

The Minicell is the simplest and the smallest DAF clarifier in the KWI product line. It is designed for small flows.

Main advantages :

- Very competitive price.
- Simple operation.
- Excellent performance with "difficult" and "fragile" sludge quality - the sludge blanket does not move and the risk of having "sinking flocs" is negligible (the sludge is not pushed to the sludge extraction device as the spiral scoop is travelling around the sludge blanket) .
- 3 different tank heights available (choice according to the application).

Main applications :


- Excess biological sludge clarification and thickening before further de-watering (for small installations) (excellent application in case of biological phosphorous removal. This reduce also the polymer consumption in the sludge de-watering system).
- Industrial effluents from the food industry in combination with chemical treatment.
- Industrial low flow effluents.

The tank and the construction of the **MINICELL** can be adapted to the application and to the effluent.

The depth of the tank varies according to the type of the effluent, the inlet solid concentration and the requirements of the application (clarification with or without chemicals, sludge thickening,...)

MINICELL is available in 9 sizes from 16 to 300 m³/h.




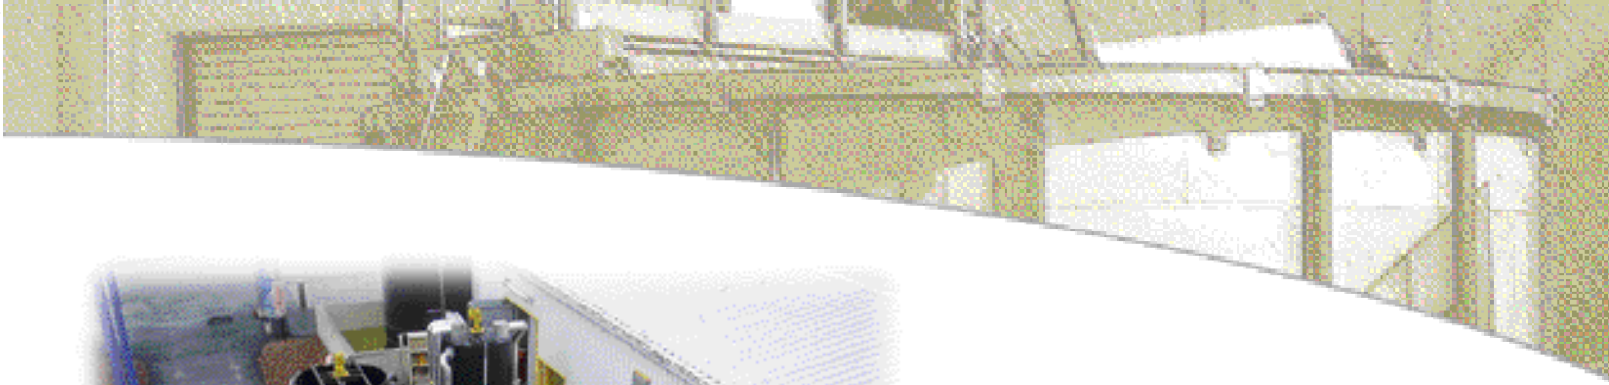

MNC 12 - Sugar refinery effluent



MNC 10 - Tannery effluent

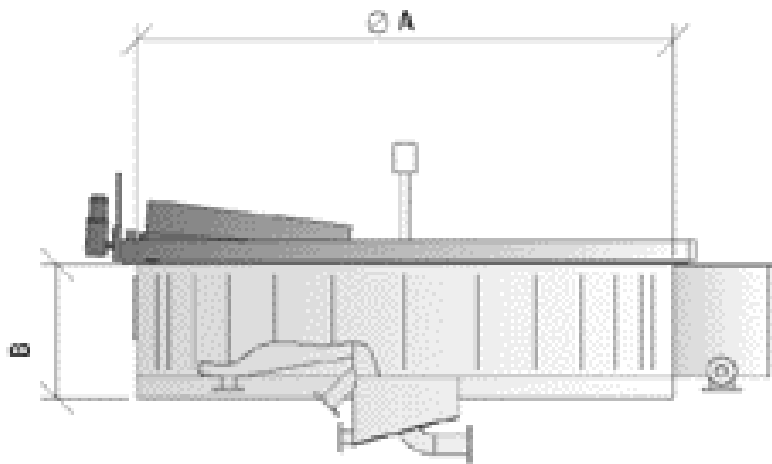

Type	Max. flow (m³/h)	Motor scoop (kW)	Motor carriage (kW)	ø A (mm)	B (mm)	Weight tons (full of water)
MNC 6	16	0,25	-	1850	1000/1500	3/4,3
MNC 8	34	0,25	-	2400	1000/1500	5/7,2
MNC 10	60	0,37	-	3200	1000/1500/2000	8/11,5/15
MNC 12	90	0,55	-	3900	1000/1500/2000	12/18/24
MNC 15	115	0,55	-	4500	1000/1500/2000	15/23/31
MNC 18	180	0,75	0,75	5500	1500/2000	34/46
MNC 20	220	0,75	0,75	6100	1500/2000	42/57
MNC 22	250	1,5	1,5	6700	1500/2000	51/68
MNC 24	300	1,5	1,5	7200	1500/2000	60/85

KWI - Engineering

Acti-village, lot 15 - F-69500 Bron - France
 Tél. : +33 (0)4 72 37 05 42 - Fax : +33 (0)4 72 37 82 46
 Email : info.france@kwi-intl.com



www.kwi-intl.com

KWI - Operations Headquarters

KOREKO - KWI GmbH
 Auengasse 8 - A-9170 Ferlach - Austria
 Tél. : +43 4227 3266 - Fax : +43 4227 3449
 Email : info.austria@kwi-intl.com



Atelier de fabrication ISO 9001 / 14001

