

DUPLEX FILTERS

Double flow capacity: either side can be shut off for filter bag replacement without interrupting the fluid flow. (using butterfly valves)

GENERAL SPECIFICATIONS

MATERIALS of CONSTRUCTION

WETTED PARTS	SS 316
SEALS	nitrile (NBR)
CLOSURE	swingbolts in galvanised steel
CONNECTIONS	FLANGED or THREADED
VALVES	BUTTERFLY

FILTRATION 'standard' filter basket, diameter 175 mm.
 Either double length (750 mm) or single length (375 mm)

To fit 'standard' filter bags in filtration felts (1 - 100 microns), mono-filament woven gauzes (100 - 1000 microns) in nylon, polyester and polypropylene, or STRAINER baskets in perforated sheet, with or without woven stainless steel wire mesh liners.

Other specialist filter media and materials are available.

Features, fittings, orientations all to customer requirements.




LB2 SS FB DV
 DOUBLE LENGTH BASKETS

FB = FLAT BASE
 RB = ROUND BASE



LB2 SS RB DVT
 DOUBLE LENGTH BASKETS

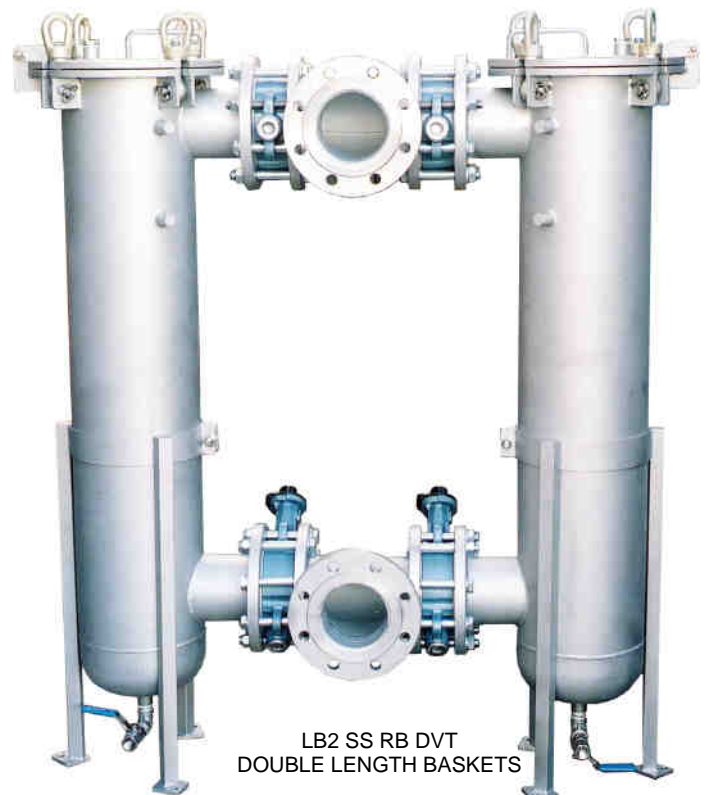

MANUFACTURED in the UK